


Vibration and environmental combined tests



512 dm³ environmental chamber designed to be adapted on a vibrating pot.

Set on rails, this chamber slides sideways to free the vibrating pot which enables the user to work very easily on his product.

Different accessories make possible an easy mechanical interfacing with the pot but also the use of the chamber on its own.

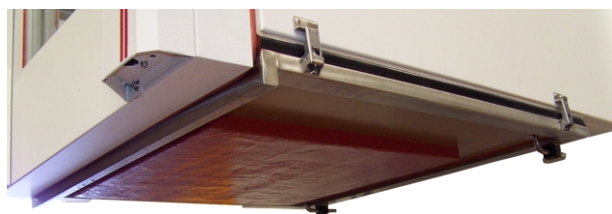

Dimensions (mm)	W	D	H
Useful	800	800	800
Overall	1100	2100	2200

Climats

SPECIAL



Technical features

Temperature range

from +150°C to -70°C

Speed variation

10°C/min average from +150°C à -50°C and the other way round, with a 20 kg load made of stainless steel and copper

Hygrometry

from 10 to 98% humidity within the temperature range from +20°C to +90°C, limited by a dewpoint of +8°C

Homogeneity and Regulation

Temperature homogeneity

below $\pm 1^\circ\text{C}$ within the range

stability of $\pm 0,5^\circ\text{C}$ within the range

